




Technical Data

RECESSED WASTE RECEPTACLE

B-36703

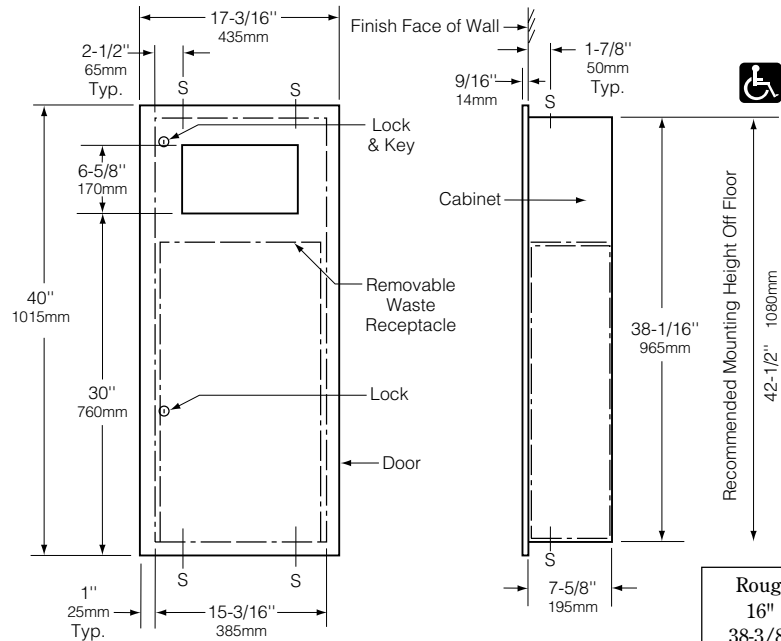

<p>Rough Wall Opening 16" (405mm) wide 38-3/8" (975mm) high 7-3/4" (197mm) minimum recessed depth</p>
--

MATERIALS:

Cabinet & Flange — 18-8 S, type-304 stainless steel. All-welded construction. Exposed surfaces have satin finish.

Door — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. 9/16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories.

Waste Container — Removable, leakproof, rigid molded plastic. Capacity: 12 gal. (45.4 L).

OPERATION:

Waste receptacle is emptied by unlocking door with key provided and removing plastic waste-container. Door conceals flange from view. Cable door-swing limiter prevents damage to washroom accessories and walls.

INSTALLATION:

Provide framed rough wall opening 16" wide x 38-3/8" high (405 x 975mm). Minimum recessed depth required from finish face of wall is 7-3/4" (197mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount unit in rough wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished).

SPECIFICATION:

Recessed waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall have 9/16" (14mm) 90° return; shall be secured to cabinet with a concealed, full-length, stainless steel piano-hinge; and equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Door shall conceal flange from view. Unit shall be furnished with a removable, leakproof, rigid molded plastic waste-container that has a capacity of 12 gal. (45.4 L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

Recessed Waste Receptacle shall be Model B-36703 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.