



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 120

ISSUED: 1-87

REVISED: 9-96

**SECURITY CLOTHES HOOK - FRONT MOUNTED**

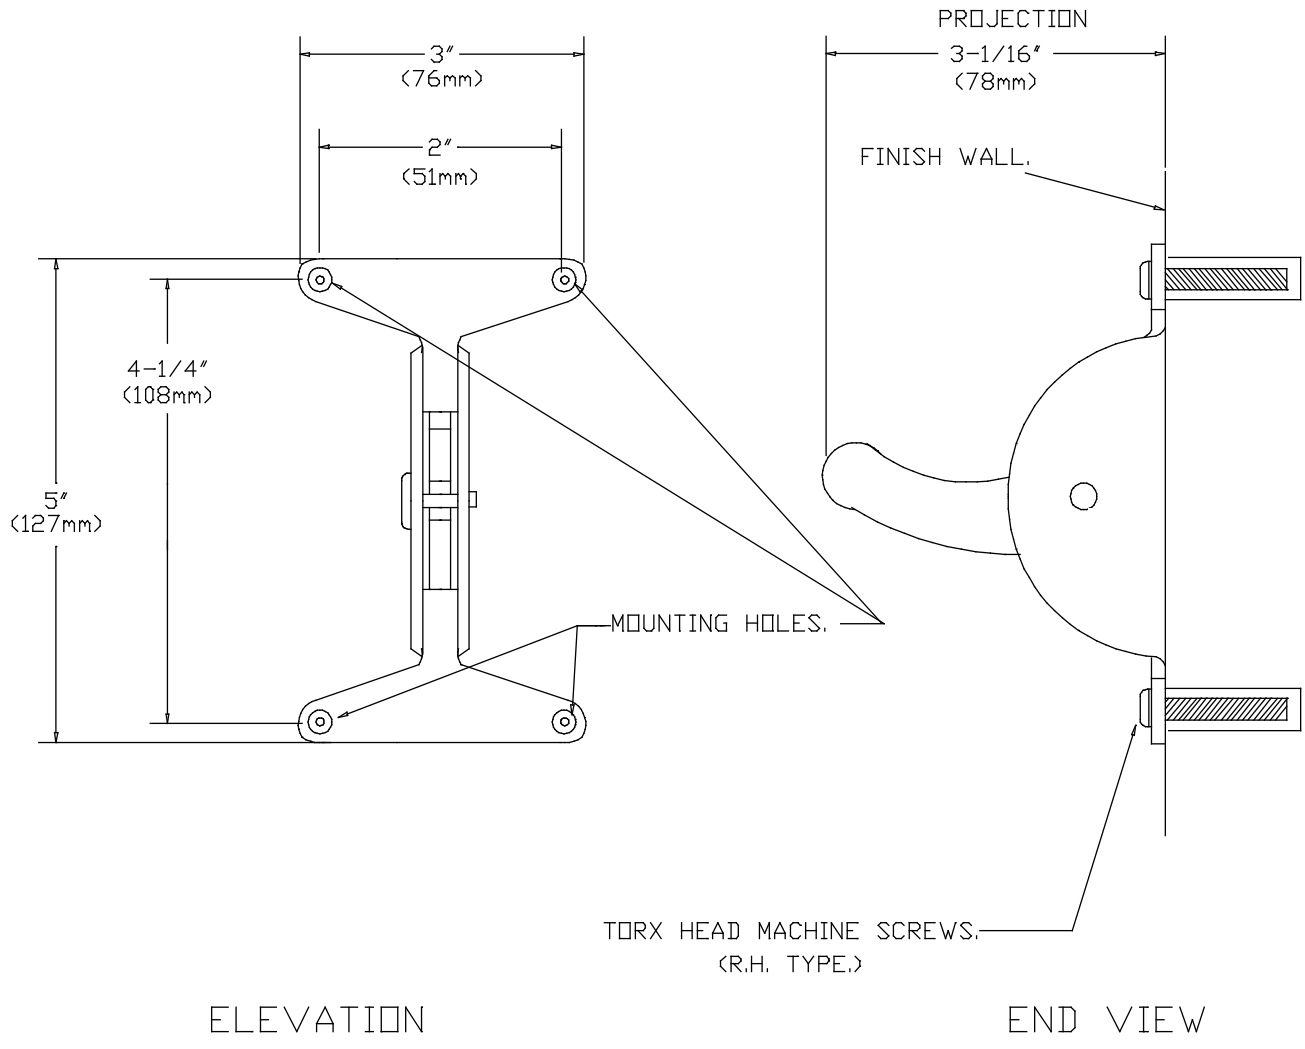

**SPECIFICATION**

Security Clothes Hook for Front Mounting shall be fabricated of alloy 18-8 stainless steel, type 304; №11 gauge for bracket, №7 gauge for hook. Safety hook shall be secured to bracket with tamper resistant stainless steel spanner screws and shall tip downward when load exceeds limit set by adjusting tension on rubber friction washers with screw. Internal stop shall prevent hook from being set in vertical-up position. All exposed surfaces shall be №4 satin finish.

**Security Clothes Hook - Front Mounted shall be Model № 120 as fabricated by American Specialties Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913**

**INSTALLATION**

Unit is surface mounted to wall or partition using (4) 1/4-20 x 2" long Torx® pan head screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). For compliance with ADA Accessibility Guidelines, unit should be installed so that centerline of the hook is 54" (1372mm) maximum above finished floor (AFF) when clear floor side reach access is provided, or 48" (1219mm) max. AFF if clear floor forward reach access is provided.

**Accessory Specialties**

**AMERICAN DISPENSER**

**Desert Ray Products**

**WATROUS INC.**